

# Consumer Microcircuits Limited

PRODUCT INFORMATION

## FX306 Audio Filter Array



ESCO ITALIANA s.p.a.  
20099 SESTO S. GIOVANNI (MI)  
Via Modena, 1 - ☎ (02) 2409241-2409251  
Telex: ESCOMI 322383  
Filiale di Bologna  
Via Dei Lapidari, 8 - ☎ (051) 323042  
Filiale di Torino  
Via L. Boccherini, 29 - ☎ (011) 2051384  
Filiale di Vicenza  
Viale Mazzini, 131 - ☎ (0444) 46355


Publication D/306/3 December 1984



Provisional Issue  
With compliments  
of Island Labs

### Features

- Cellular Radio Audio Processing to NMT TACS AMPS Specification
- Low Group Delay Distortion
- Switched Capacitor Filters
- On-Chip Uncommitted Amplifier
- Xtal Controlled
- Chip Enable Powersave Feature
- Low-Power CMOS Process
- Choice of Package Styles
- Few External Components
- Single 5-Volt Supply

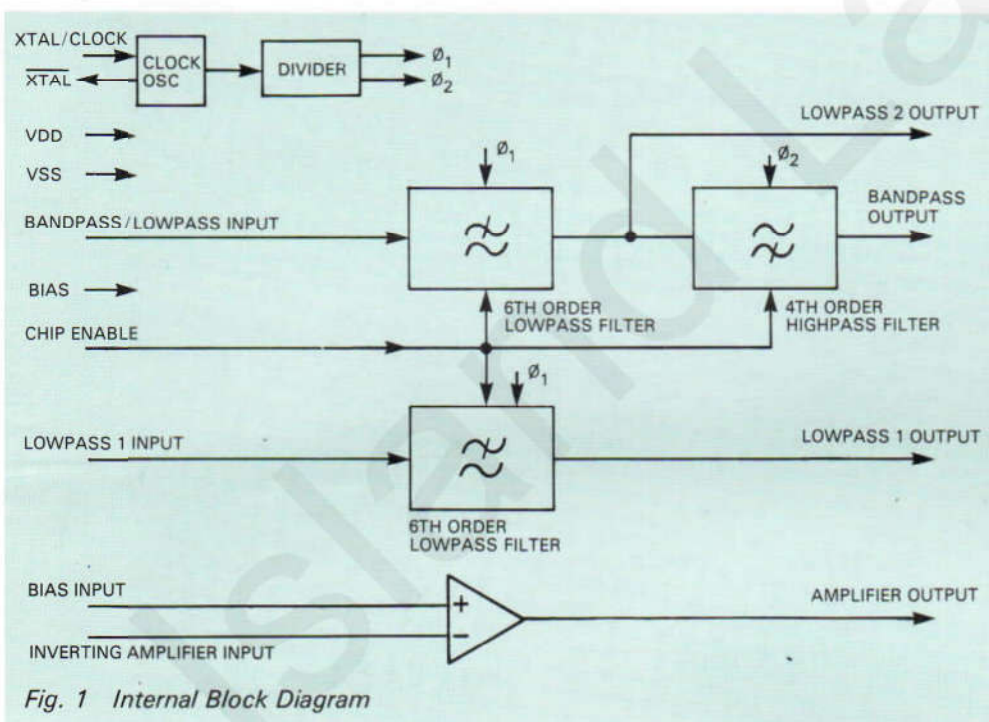

# FX306

Fig. 1 Internal Block Diagram

### Brief Description

The FX306 is a low-power CMOS switched capacitor filter array designed to meet the NMT TACS and AMPS audio processing specifications. The device consists of:

- (1) a 3.4 kHz lowpass filter.
- (2) a 300 Hz—3.4 kHz bandpass filter (lowpass filter identical to that of (1) in series with a highpass filter).
- (3) an uncommitted amplifier.

The two 6th order lowpass filters provide a low group delay distortion path. The amplifier

may be used for any specific applications such as, pre-emphasis, de-emphasis, buffering etc. An on-chip oscillator uses a 1 MHz xtal and provides all reference clocks for the switched capacitor filters via a divider chain. Alternatively an external clock maybe used.

The chip enable feature is used to disable the filter sections thus reducing current consumption.

**Pin Description Function**

D.I.L. FX306J	Quad Plastic FX306L/LV1	
1	1	<b>Amp O/P:</b> Uncommitted amplifier output.
2	2	<b>VSS:</b> Negative Supply.
3	6	<b>LP (2) O/P:</b> Buffered output from the intermediate lowpass filter (Bandpass arrangement).
4	7	<b>Chip Enable:</b> Internally pulled to VDD. A logic '0' applied to this input will disable all filters (powersave mode).
5	8	<b>Xtal:</b> 1 MHz xtal O/P. Inverting output of on-chip oscillator.
6	9	<b>Xtal/Clock:</b> 1 MHz xtal I/P or externally derived clock can be injected into this I/P. Input to on-chip inverting oscillator.
7	11	<b>LP (1) O/P:</b> Output of separate lowpass filter.
8	12	<b>VSS:</b> Negative Supply.
9	13	<b>LP (1) I/P:</b> Input of separate lowpass filter.
10	14	<b>VSS</b> Negative Supply.
11	17	<b>BP I/P / LP (2) I/P:</b> Bandpass/lowpass filter (2) input.
12	18	<b>Bias:</b> VDD/2 Bias Pin. Externally decoupled by C <sub>4</sub> and C <sub>5</sub> . (See Fig 2, Note 1.)
13	20	<b>BP O/P:</b> Bandpass filter output.
14	21	<b>Bias: I/P:</b> Connect externally to 'Bias' pin.
15	23	<b>Amp I/P:</b> Uncommitted inverting amplifier input.
16	24	<b>VDD:</b> Positive Supply.

FX306L/LV1 Pin numbers 3, 4, 5, 10, 15, 16, 19, 22 are not connected.

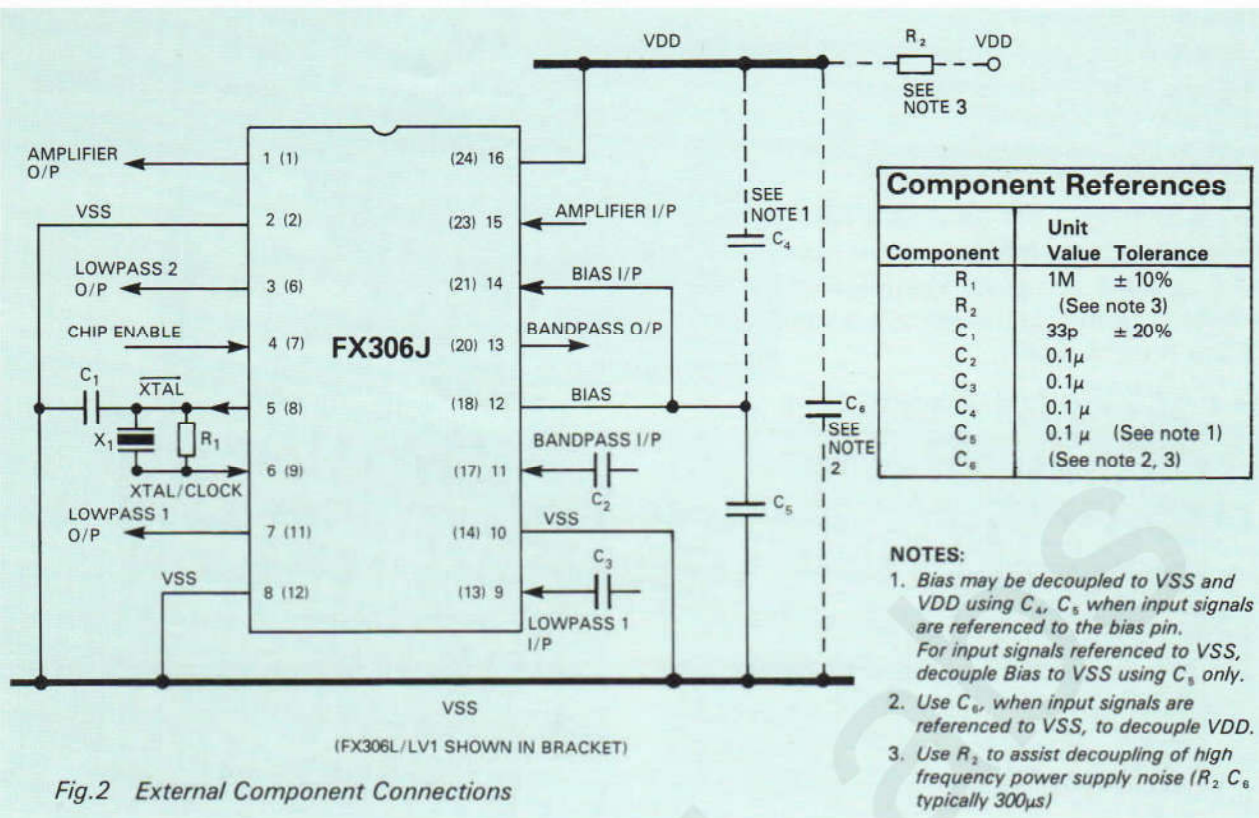


Fig. 2 External Component Connections

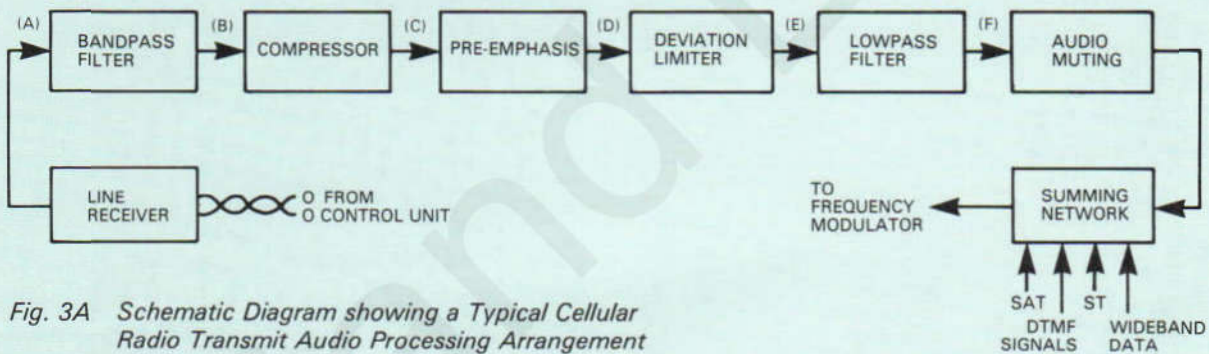


Fig. 3A Schematic Diagram showing a Typical Cellular Radio Transmit Audio Processing Arrangement

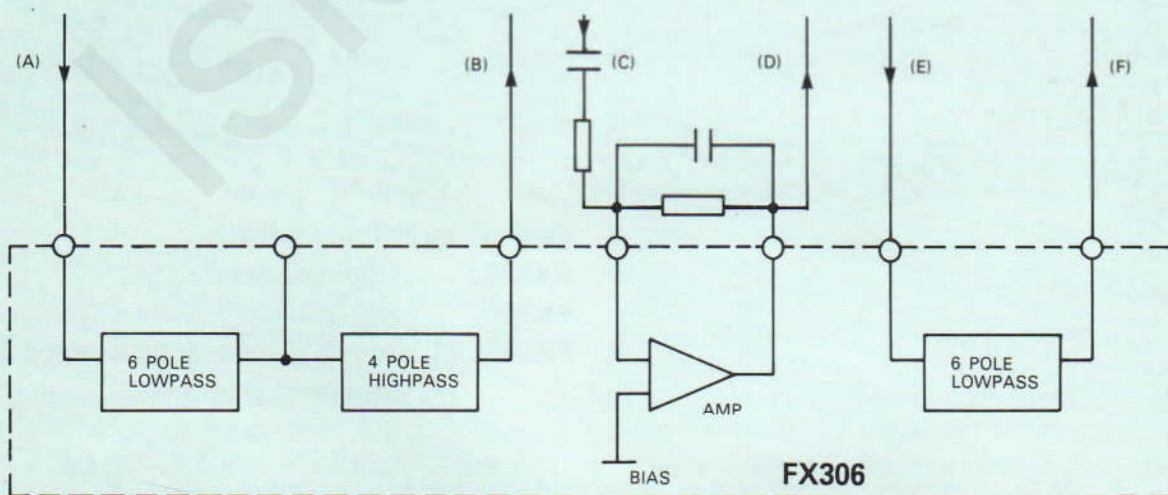


Fig. 3B The FX306 used in the above application

## Specification

### Absolute Maximum Ratings

Exceeding the maximum rating can result in device damage. Operation of the device outside the operating limits is not implied.

Supply voltage	-0.3V to 7.0V
Input voltage at any pin (ref VSS = 0V)	-0.3V to (VDD + 0.3V)
Output sink/source current (total)	20mA
Operating temperature range: FX306J	-30°C to + 85°C
FX306L	-30°C to + 70°C
Storage temperature range: FX306J	-55°C to + 125°C
FX306L	-40°C to + 85°C

### Operating Limits

All characteristics measured using the following parameters unless otherwise specified:

VDD = 5V, T<sub>A</sub> = 25°C,  $\phi$  = 1MHz,  $\Delta f \phi = 0$ , f<sub>in</sub> = 1kHz.

Characteristics	See Note	Min	Typ	Max	Unit
<b>Static Characteristics</b>					
Supply voltage		4.5	5	5.5	V
Supply current (Enabled)		—	3.5		mA
Supply current (Disabled)		—	500		μA
Input impedance (Filters & Amplifier)		100		—	kΩ
Output impedance (Filters)		—	3		kΩ
Output impedance (Amplifier open loop)		—	800		Ω
Output impedance (Amplifier closed loop)		—	6		Ω
Input logic '1'		3.5	—	—	V
Input logic '0'		—	—	1.5	V
<b>Dynamic Characteristics</b>					
Signal input dynamic range LP	1		40		dB
BP	1		40		dB
Cut off frequency (-3dB) LP			3400		Hz
HP			260		Hz
Group Delay (900-2100Hz) LP			30	60	μs
BP			60		μs
Noise and Distortion LP	2		45		dB sinad
BP	2		35		dB sinad
Passband ripple (400-3000Hz)				2	dB absolute
Lowpass attenuation f > 4kHz	3		10		dB
f > 6kHz	3		35		dB
Highpass attenuation f < 200Hz	3		15		dB
Insertion loss f = 1kHz			0		dB
<b>Inverting Amplifier</b>					
Gain open loop	3		30		dB
Gain bandwidth product			1		MHz

**Note:** 1. For 20dB sinad (psophometrically weighted)  
 2. -6dBm input (psophometrically weighted)  
 3. Relative to 1kHz, 100mV rms input level.

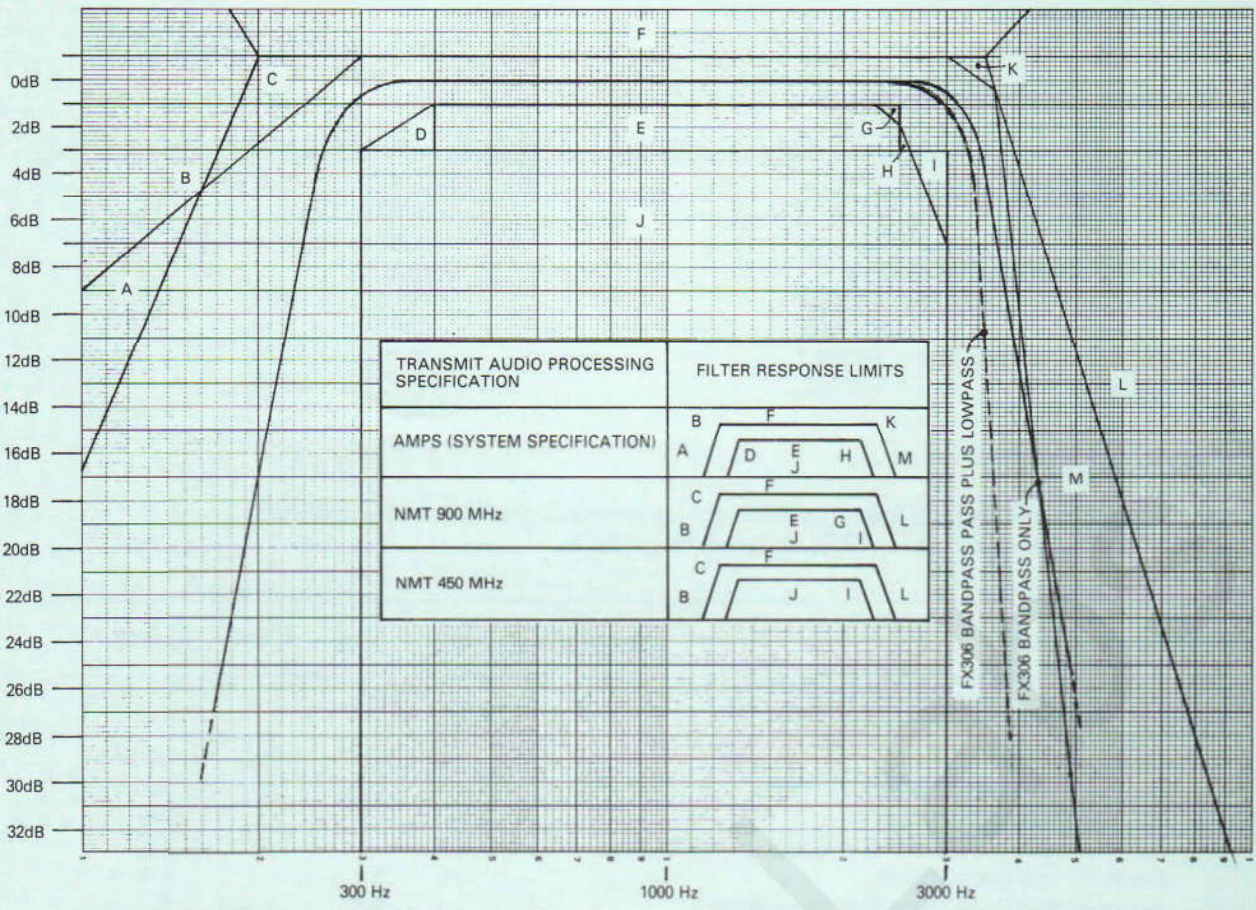


Fig. 4 FX306 Typical Filter Response Curves



Fig. 5 FX306 Typical Group Delay Characteristics

## Package Outlines

The cerdip package of the FX306J is shown in Figure 6. The plastic encapsulated FX306L of Figure 7 is supplied in the disposable carrier for handling convenience. The FX306LV1 of Figure 8 is supplied in a conductive tray. The FX306L/LV1 has an indent (spot) adjacent to Pin 1 and a chamfered corner between Pins 3 and 4 to allow complete identification. Pins number counter-clockwise when viewed from the top (indent side).

Fig. 6 FX306J D.I.L. Package


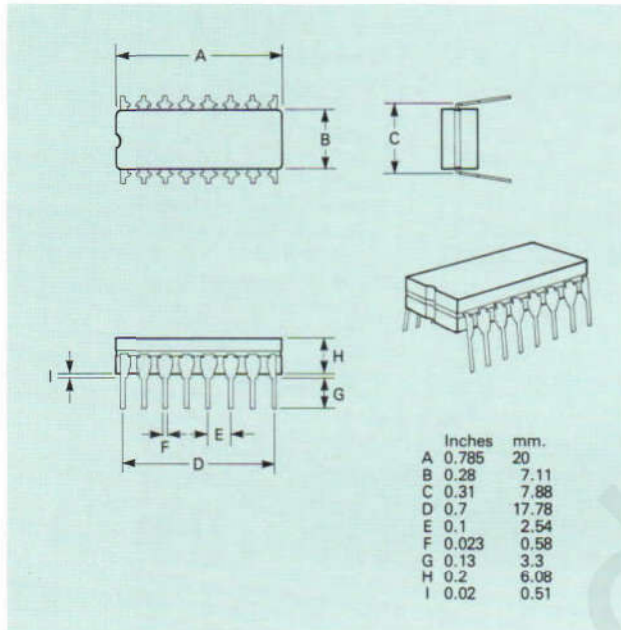



Fig. 7 FX306L Package

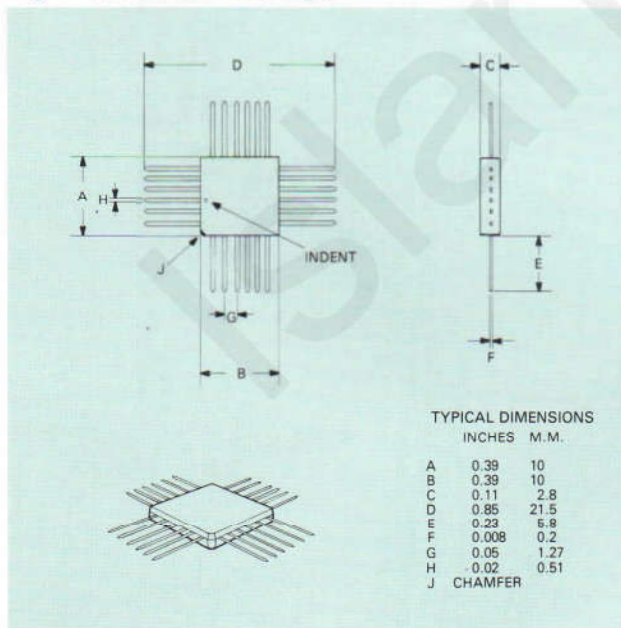

## Handling Precautions

The FX306J/L/LV1 is a CMOS LSI circuit which includes input protection. However, precautions should be taken to prevent static discharges which can cause damage.

Fig. 8 FX306LV1 Package

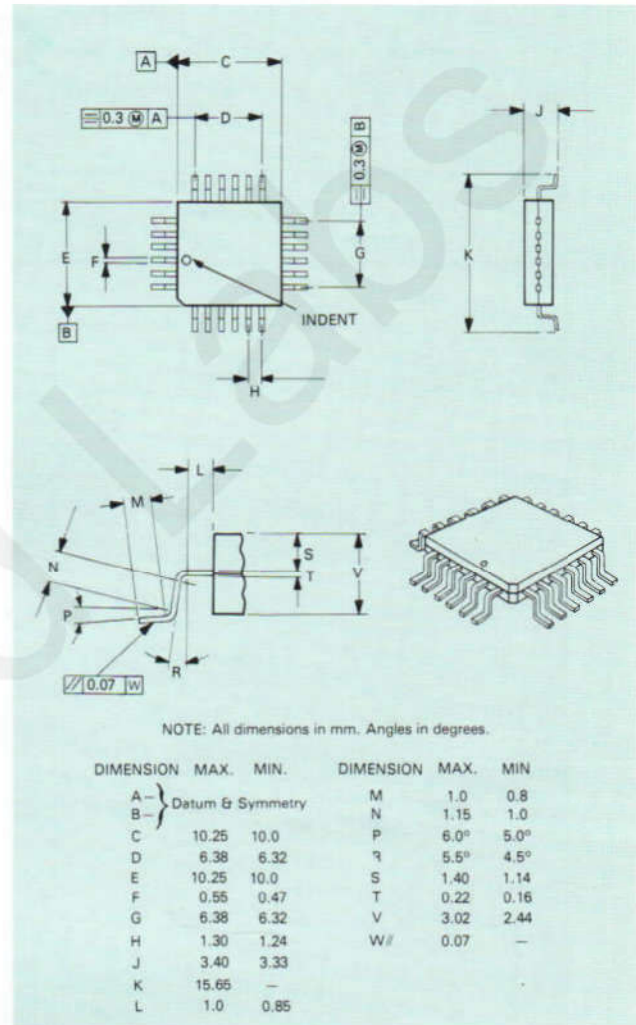

## Ordering Information

- FX306J** 16-pin Ceramic D.I.L.  
**FX306L** 24-pin quad plastic encapsulated.  
**FX306LV1** 24-pin quad plastic encapsulated, bent and cropped.

CML does not assume any responsibility for the use of any circuitry described. No circuit patent licences are implied and CML reserves the right at any time without notice to change the said circuitry.



**CONSUMER MICROCIRCUITS LIMITED**  
 WHEATON ROAD · INDUSTRIAL ESTATE EAST  
 WITHAM · ESSEX CM8 3TD · ENGLAND

Telephone: 0376 513833  
 Telex: 99382 CMICRO G