
MITSUBISHI RF POWER MODULE



144-175MHz, 12.5V, 7W, FM PORTABLE RADIO

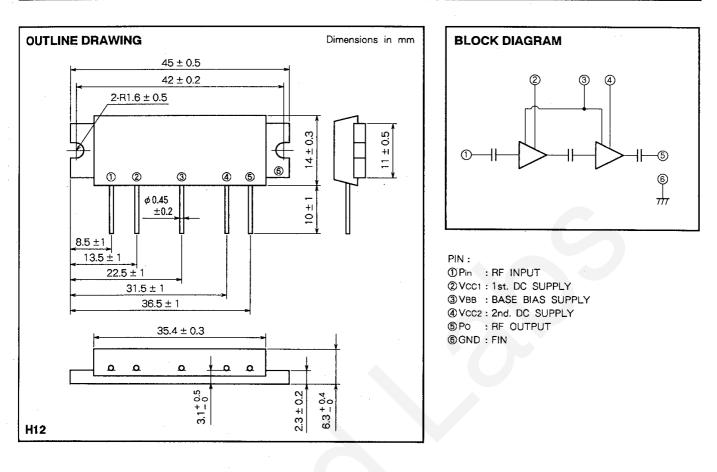

ABSOLUTE MAXIMUM RATINGS (Tc = 25 °C unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
Vcc	Supply voltage		16	V
VBB	Base bias		6	V
lcc	Total current		4	A
Pin(max)	Input power	$V_{CC1} = 12.5V, Z_G = Z_L = 50 \Omega$	40	mW
P0(max)	Output power	$Z_G = Z_L = 50 \Omega$	10	W
Tc(op)	Operation case temperature		- 30 to 110	°C
Tstg	Storage temperature		- 40 to 110	°C

Note. Above parameters are guaranteed independently.

ELECTRICAL CHARACTERISTICS (Tc = $25 \,^{\circ}$ C unless otherwise noted)

Symbol	Parameter	Test conditions	Limits		1.1
			Min	Max	Unit
f	Frequency range		144	175	MHz
Po	Output power	$V_{CC1} = V_{CC2} = 12.5V$	7		W
ητ	Total efficiency	$V_{BB} = 5V$	40		%
2fo	2nd. harmonic	$P_{in} = 20 mW$		- 20	dBc
3fo	3rd. harmonic	$Z_G = Z_L = 50 \Omega$		- 30	dBc
ρin	Input VSWR			2.5	-
_	Load VSWR tolerance	$\begin{array}{l} V_{CC1} = V_{CC2} = 13.2V, \ V_{BB} = 5V \\ P_{O} = 7W \ (P_{in}: controlled) \\ Load \ VSWR = 20:1 \ (All \ phase) \\ Z_{G} = 50\Omega \end{array}$	No degradation or destroy		


Note. Above parameters, ratings, limits and conditions are subject to change.






Island Labs

144-175MHz, 12.5V, 7W, FM PORTABLE RADIO

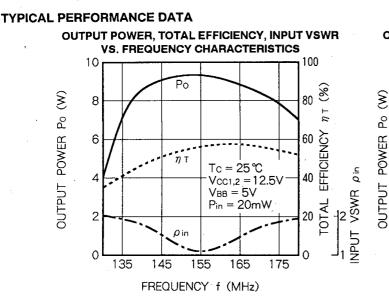

OUTPUT POWER, TOTAL EFFICIENCY, INPUT VSWR **VS. FREQUENCY CHARACTERISTICS** 10 100 8 Po 80 8 ηT 6 EFFICIENCY 60 nт Tc = 25℃ , D 4 Vcc1,2 = 10.8V 40 $V_{BB} = 5V$ NPUT VSWR $P_{in} = 20 mW$ TOTAL 2 20 ho in 0 0 135 145 155 165 175 FREQUENCY f (MHz)




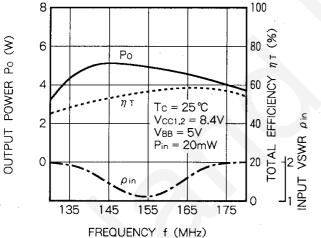


OUTPUT POWER, TOTAL CURRENT, 1st CURRENT VS. INPUT POWER CHARACTERISTICS 10 Tc = 25℃ Po 7 f = 160MHz 5 Vcc1,2 = 12.5 S CURRENT IT (A) CURRENT lcc1 (A) 3 VBB = 5V å 2 OUTPUT POWER 1 lτ 0.2 0.7 Icc. 0.5 AL 0.1 0.3 Ist 5 0.07 0.05 0.05 0.03 0.03 2 50 3 5 10 20 30 7

INPUT POWER Pin (mW)

OUTPUT POWER, TOTAL CURRENT, 1st CURRENT VS. INPUT POWER CHARACTERISTICS

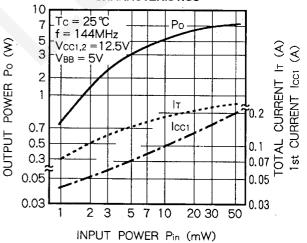


OUTPUT POWER, TOTAL CURRENT, 1st CURRENT VS. INPUT POWER CHARACTERISTICS

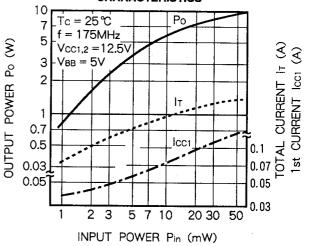




144-175MHz, 12.5V, 7W, FM PORTABLE RADIO

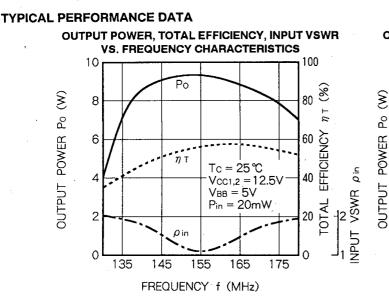

OUTPUT POWER, TOTAL EFFICIENCY, INPUT VSWR **VS. FREQUENCY CHARACTERISTICS** 10 100 8 Po 80 8 ηT 6 EFFICIENCY 60 nт Tc = 25℃ , D 4 Vcc1,2 = 10.8V 40 $V_{BB} = 5V$ NPUT VSWR $P_{in} = 20 mW$ TOTAL 2 20 ho in 0 0 135 145 155 165 175 FREQUENCY f (MHz)




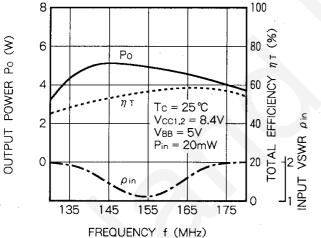

OUTPUT POWER, TOTAL CURRENT, 1st CURRENT VS. INPUT POWER CHARACTERISTICS 10 Tc = 25℃ Po 7 f = 160MHz 5 Vcc1,2 = 12.5 S CURRENT IT (A) CURRENT lcc1 (A) 3 VBB = 5V å 2 OUTPUT POWER 1 lτ 0.2 0.7 Icc. 0.5 AL 0.1 0.3 Ist 5 0.07 0.05 0.05 0.03 0.03 2 50 3 5 10 20 30 7

INPUT POWER Pin (mW)

OUTPUT POWER, TOTAL CURRENT, 1st CURRENT VS. INPUT POWER CHARACTERISTICS

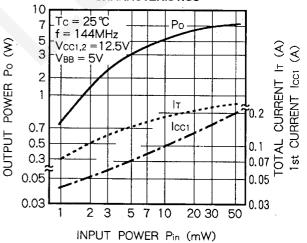

OUTPUT POWER, TOTAL CURRENT, 1st CURRENT VS. INPUT POWER CHARACTERISTICS

